

Vert-X 32E - 8 ... 35V / Push-Pull/HTL**32E5dD36176602****Technical datas**

Mechanical version	Magnetic actuator type 5
Mounting hole	Through-hole $\varnothing$ 4.4 mm with counter bore $\varnothing$ 8 mm/magnetic actuator side
Sensor principle	MH-S
Electrical angle	Electrical angle 360°
Power supply voltage	24 VDC
Output signal	Incremental
Output characteristics / output d	Push-pull/HTL (A,B)
Electrical connection	Cable, 6-pole
Length of cable	1.0 m (cable)

Electrical Datas

Measuring range	°	0...360
Indep. linearity (without misalignment)	%	± 0.5
Indep. linearity (with permitted misalignment @ 360°)	%	± 1
Max. hysteresis	°	0.5
Resolution	bit	256 (1-1024)
Max. repeatability	°	0.1
Max. temperature coefficient of output signal	ppm/K	50
MTTFd / MTBF		upon request
Power supply voltage	VDC	8 ... 35
Current consumption without load (typ.)	mA	24
Max. capacitive load at output	nF	1
Max. latency	μ s	10
Max. current at output	mA	30
Reverse polarity protection of power supply		no
Electrical connection (A;B)		Round cable, 4-pole
Electrical connection (A;B;Z)		Round cable, 6-pole
Cross section of single wires (A;B)	mm ²	0.35 (AWG22)
Cross section of single wires (A;B;Z)	mm ²	0.25 (AWG24)
Redundancy possible		no

Mechanical Datas

Mechanical range	°	360 (continuous)
Protection rating		IP68/IP69K
Min. life	movements	no limitation
Operating & storage temperature	°C	-40...+85
EN 60068-2-6, vibration (Amax = 0.75 mm, f = 5–2,000 Hz)	g	20
EN 60068-2-27, shock	g	50

Standards

EN 55011, Emission (Cl. B)		
EN 61000-4-2, ESD (contact discharge / air discharge)	kV	$\pm 4 / \pm 8$
EN 61000-4-3, Immision HF radiated (80–1000 MHz/1.4–2.7 GHz)	V/m	30
EN 61000-4-4, Burst (on all lines)	kV	± 1
EN 61000-4-5, Surge (lines to ground)	kV	± 1
EN 61000-4-6, Immision HF conducted (0.15–80 MHz)	Vemf	10
EN 61000-4-8, Immision magnetic field (50 Hz)	A/m	300
Insulation resistance (500 VDC, 1 bar, 2s)	GOhm	20

Features

- Bearingless incremental Encoder
- Resolution ex factory free programmable from 1ppr to max. 1024 ppr
- Non-contact, wear-free sensing system with high permissible installation tolerances
- High protection class IP68/ IP69K
- Compact dimensions
- Very fast, non-contacting measuring method
- Very long life
- Applications under adverse ambient conditions possible (humidity, dampness, dust, vibrations etc.)
- Low temperature coefficient of the output signal

Vert-X 32E - 8 ... 35V / Push-Pull/HTL

32E5dD36176602



Dielectric strength (VAC, 50 Hz, 1 min, 1 bar)

kV

1

Options


Custom cable

Custom magnetic actuator

Custom output driver


Custom resolution (1-1024 ppr)

Higher speed on request

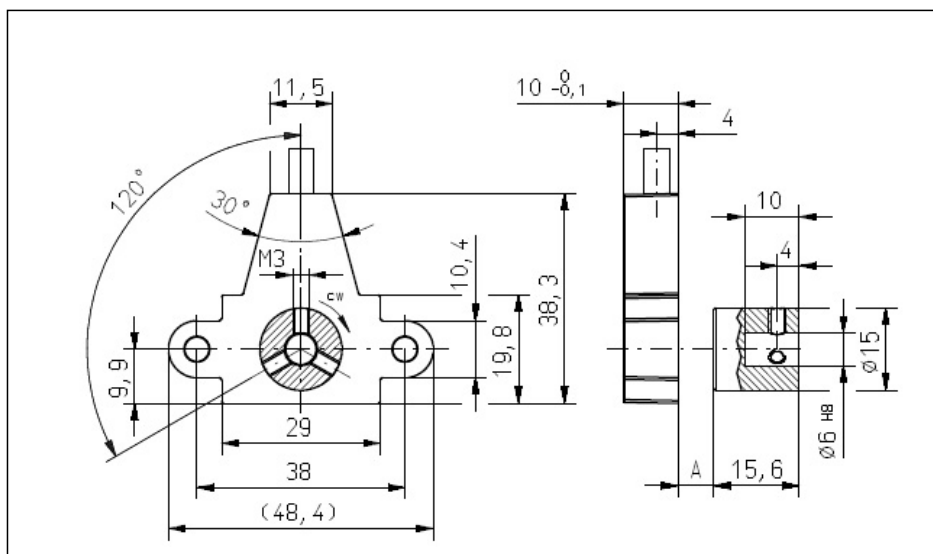

Operating range/Air gap (A)

- 0.7 ... 3.2mm

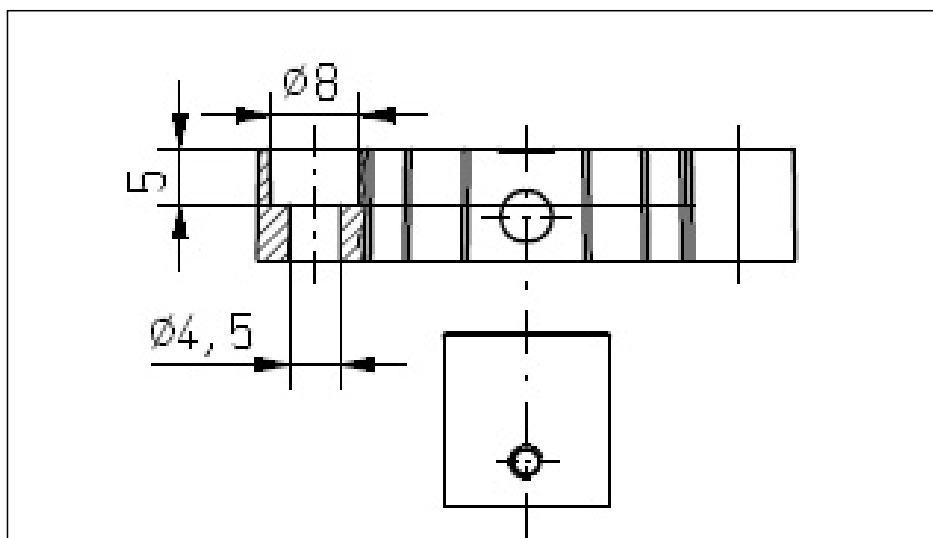



Vert-X 32E5b

Vert-X 32E - 8 ... 35V / Push-Pull/HTL

32E5dD36176602



Vert-X 32E5d

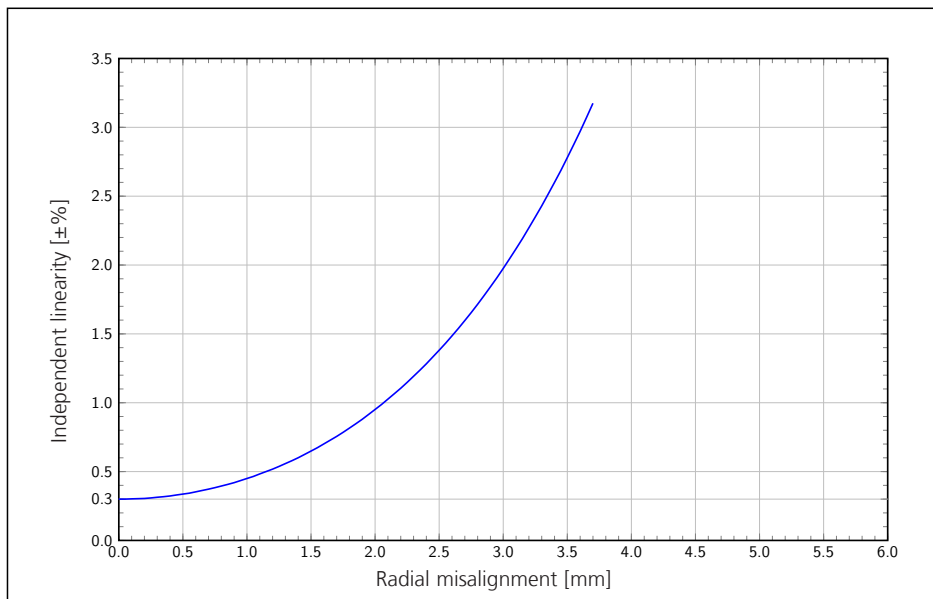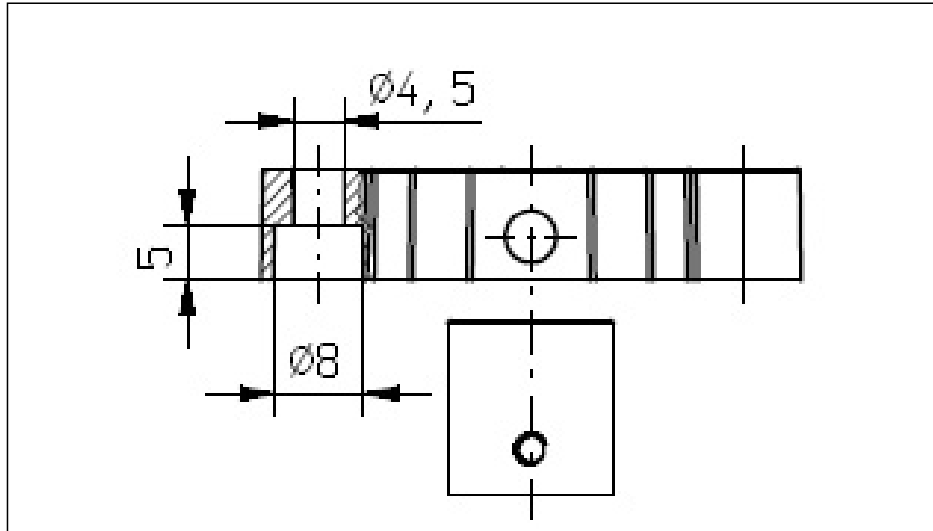

Indep. linearity with radial misalignment (@360°)