


Vert-X 31E - 10.8 ... 35V / 0.1 - 10V / Single**31E6b736111402****Technical datas**

Mechanical version	Magnetic actuator type 6
Mounting hole	Through-hole ø4.4 mm with counterbore ø7.4 mm
Sensor principle	MH-C
Electrical angle	Electrical angle 360°
Power supply voltage	24 VDC
Output signal	0.1–10 V
Output characteristics	Single, positive gradient CW
Electrical connection	Round cable, 3-pole
Length of cable	1.0 m (cable)

MH-C features

- Resolution 12 bit
- Lower price than MH-C2

Electrical Datas


Measuring range	°	0...360
Indep. linearity (typ.)	% of measuring range	±0.3
Max. hysteresis	°	0.1
Resolution	bit	12
Max. repeatability	°	0.1
Sample rate fast mode	kHz	(5)
Sample rate slow mode	kHz	1.66
System propagation delay fast mode	µs	(800)
System propagation delay slow mode	µs	4600
Max. temperature coefficient of output signal	ppm/K	100
MTTFd / MTBF		upon request
Power supply voltage	VDC	10.8...35
Current consumption without load (typ.) fast mode, per channel	mA	(19)
Current consumption without load (typ.) slow mode, per channel	mA	14
Min. ohmic load at output	kOhm	10
Max. capacitive load at output	nF	100
Reverse polarity protection of power supply		yes
Electrical connection		-
Cross section of single wires	mm²	0.56 (AWG20)
Redundancy possible		no
Cross section of single wires redundant	mm²	-

Mechanical Datas

Mechanical range	°	360 (continuous)
Protection rating		IP68
Min. life	movements	no limitation
Operating & storage temperature	°C	-40...+85
EN 60068-2-6, vibration (Amax = 0.75 mm, f = 5–2,000 Hz)	g	50
EN 60068-2-27, shock	g	200

Standards

EN 55011, Emission (Cl. B)		
EN 61000-4-2, ESD (contact discharge / air discharge)	kV	±4 / ±8
EN 61000-4-3, Immision HF radiated (80–1000 MHz/1.4–2.7 GHz)	V/m	30
EN 61000-4-4, Burst (on all lines)	kV	±1

Vert-X 31E - 10.8 ... 35V / 0.1 - 10V / Single**31E6b736111402**

EN 61000-4-5, Surge (lines to ground)	kV	±1
EN 61000-4-6, Immision HF conducted (0.15–80 MHz)	V _{emf}	10
EN 61000-4-8, Immision magnetic field (50 Hz)	A/m	300
Insulation resistance (500 VDC, 1 bar, 2s)	GOhm	20
Dielectric strength (VAC, 50 Hz, 1 min, 1 bar)	kV	1

Options

Custom modification of housing

Custom cable

Custom magnetic actuator

Sample rate in fast mode

Switch functions TTL (max. 2)

Special characteristic curve

Special electrical angle between 30 and 360° (ex factory)


Electrical angle programmable (software)

Start and end point settable (additional wires)

Direction of rotation CW/CCW settable/programmable (additional wires or software)

Index point settable/programmable (additional wires or software)

Extended operating range, axial (without safety flag)

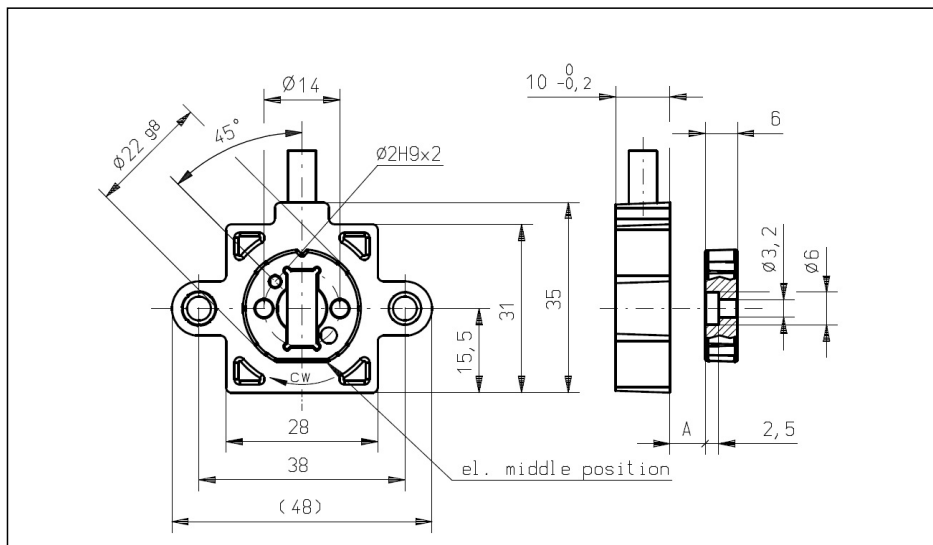**Operating range/Air gap (A)
Standard with Safety Flag**

- 0.2 ... 5.0mm => Single
- 0.2 ... 4.5mm => Redundant

**Extendend without Safety
Flag (Optional)**



- 0 ... 8.4mm => Single
- 0 ... 7.9mm => Redundant

Features Safety Flag


- Detection of magnetic loss
- System shut-down in case of magnetic actuator out of valid operating range
- Recommended for safety relevant applications

Vert-X 31E - 10.8 ... 35V / 0.1 - 10V / Single

31E6b736111402

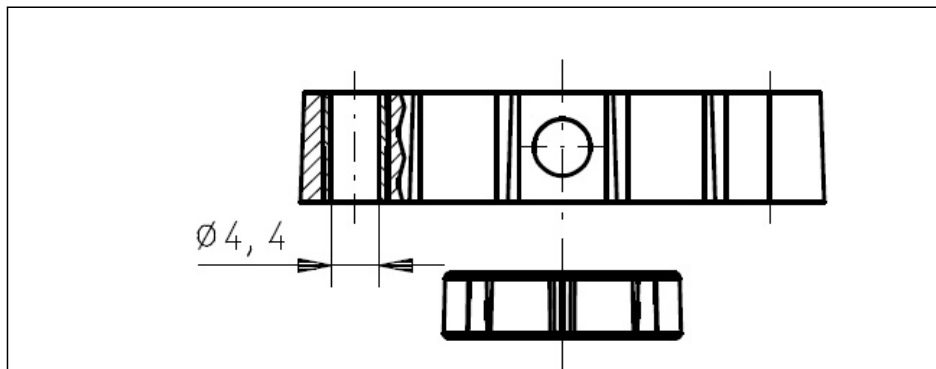



Vert-X 31E6a

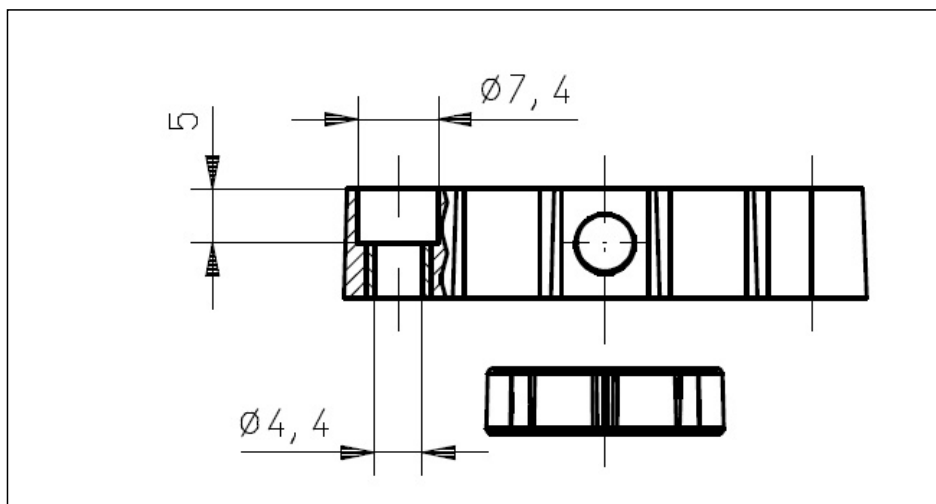

Vert-X 31E6b

Vert-X 31E - 10.8 ... 35V / 0.1 - 10V / Single

31E6b736111402

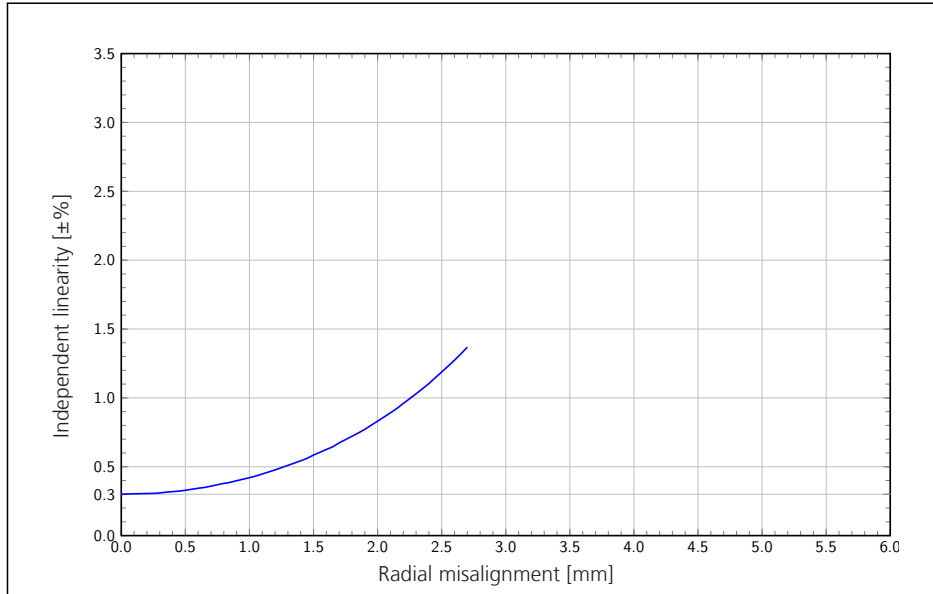

Indep. linearity with radial misalignment (@360°)